

PVC-U - BALL VALVE

BS (INCHES)

MATERIALS

Lever: PP / PVC-U
Sphere backups: PE / TEFLON
O'ring gaskets: E.P.D.M. / VITON
Body and remaining components: PVC - U

STANDARDS

The jointing valves strictly respect the standards BS 4346-1

ASSEMBLY

The jointing valves: by jointing always using appropriate glues.


SERVICE PRESSURE

The service pressure, just as an indication, is of 16 bar at 20°C (water) or 10 bar at 40°C (water), for the jointing valves up to 2" and of 10 bar at 20°C (water) or 6 bar at 40°C (water) for the screwing valves and the jointing ones of 2"½, 3" and 4".

ABREVIATION INTERPRETATION

d	- Nominal diameter
G	- Nominal diameter of the screw
Quant	- Quantity of fittings that each box contains
Gr	- Approximate weight of fittings in grams
A	- Box 13.5 x 13.5 x 12
B	- Box 29 x 23 x 16.5
C	- Box 39 x 29 x 31

PVC-U - BALL VALVE
BS (INCHES)

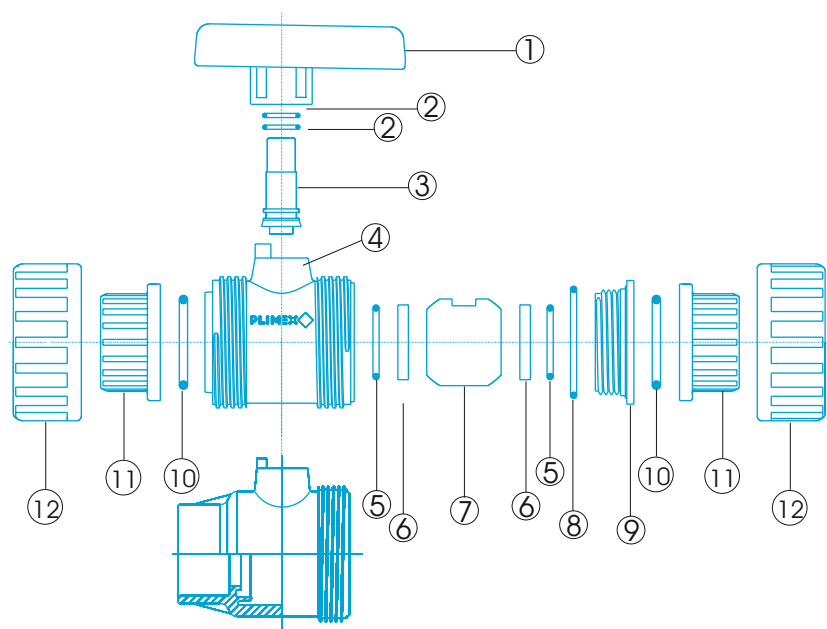

N° REF.	COMPONENT	MATERIAL	QUANT.	N° REF.	COMPONENT	MATERIAL	QUANT.
1	lever	pvc-u pp	1	7	ball	pvc-u	1
2	o'ring	epdm viton	2	8	o'ring	epdm viton	1
3	stem	pvc-u	1	9	thread cap	pvc-u	1
4	body	pvc-u	1	10	o'ring	epdm viton	2
5	o'ring	epdm viton	2	11	union ends	pvc-u	2
6	sphere backups	pe ptfe	2	12	nut	pvc-u	2