


PVC-U - 3 way ball valves

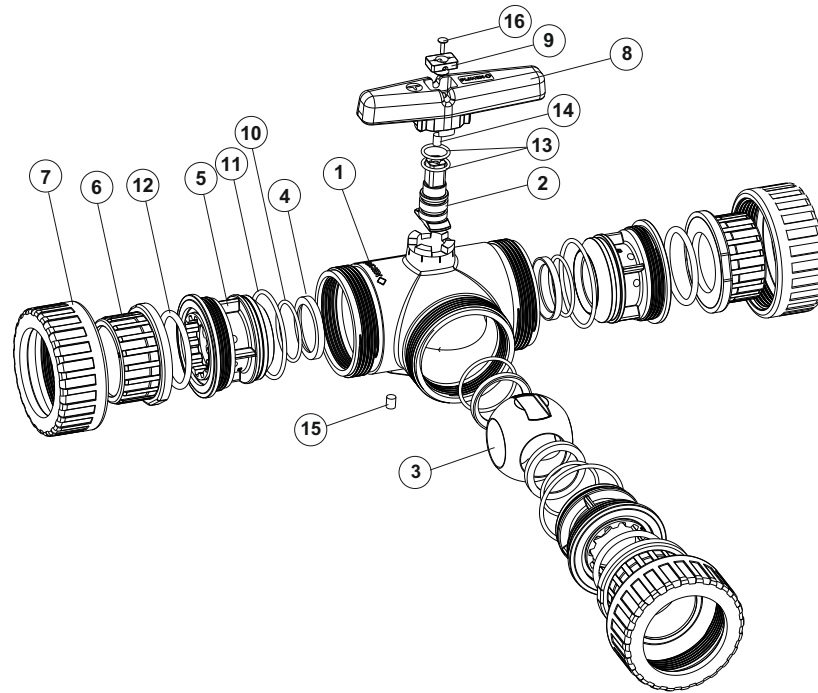

N° REF.	COMPONENT	MATERIAL	QUANT.	N° REF.	COMPONENT	MATERIAL	QUANT.	N° REF.	COMPONENT	MATERIAL	QUANT.	N° REF.	COMPONENT	MATERIAL	QUANT.
1	body	pvc-u	1	5	thread cap	pvc-u	3	9	lever protection cap	abs	1	13	o'ring	epdm viton	2
2	stem	pvc-u	1	6	union end	pvc-u	3	10	o'ring	epdm viton	4	14	insert	brass	1
3	ball	pvc-u	1	7	nut	pvc-u	3	11	o'ring	epdm viton	3	15	insert	inox steel	2
4	sphere backup	ptfe	4	8	lever	pvc-u	1	12	o'ring	epdm viton	3	16	screw	inox steel	1

STANDARDS

The jointing valves strictly respect the standards EN 1452-4.
The screwing valves strictly respect the standards EN10226-1 and ISO 7/1.

ASSEMBLY

The jointing valves: by jointing always using appropriate glues.
The screwing valves: by screwing according to ISO 7/1 recommendations.

SERVICE PRESSURE

The service pressure, just as an indication, is of 10 bar at 20°C (water)
or 6 bar at 40°C (water).

ABBREVIATION INTERPRETATION

d	- Nominal diameter
G	- Nominal diameter of the screw
Quant	- Quantity of fittings that each box contains
Gr	- Approximate weight of fittings in grams
B	- Box 29 x 23 x 16.5
V	- Box 39 x 29 x 19