


WAFER CHECK VALVES

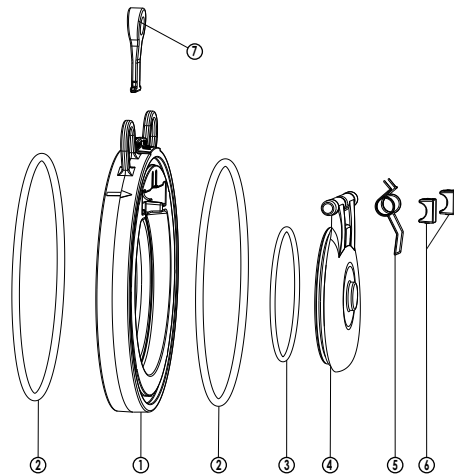

MATERIALS

1	Body	PVC-U
2	O'ring	EPDM
3	O'ring	EPDM
4	Flap	PVC-U
5	Spring	Stainless Steel AISI 302
6	Flip Clip	PVC-U
7	Handle	PVC-U

SERVICE PRESSURE

The service pressure, just as an indication, is 10 bar at 20°C (water) for sizes from Ø63 to Ø140, and 6 bar at 20°C (water) for Ø160 and Ø225.

ASSEMBLY

Install in PN10 pipe;

Do not install the valve directly to a pump, bend or elbow, respecting a minimum distance of 5 x D;


To ensure valve operation, respect the alignment of the piping to the valve;

The valve can be installed horizontally or vertically;

If the valve is installed vertically, the fluid flow must be in the upward direction;

The valve handle is removable;

The tightening of the screws must be done crosswise, as exemplified in the image, using the indicated torque.

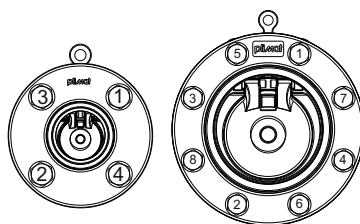

D	63	75	90	110/125	140	160	200/225
Nm	10	15	15	20	20	25	40

ABBREVIATURE INTERPRETATION

- d - Nominal diameter
- Quant - Quantity of fittings that each box contains
- Gr - Approximate weight of fittings in grams
- B - Box 29 x 23 x 16.5
- C - Box 39 x 29 x 31
- Q - Box 48x46x8.5