

KNIFE GATE VALVES

STANDARDS

The jointing valves strictly respect the standards EN1452, BS 4346-1 and ASTM D 2467.

The screwing valves strictly respect the standards BSP and BSPT ISO 7/1, and ANSI B2.1.

ASSEMBLY

Suited for flow control using minimal piping space.

Easy valve handling.

Supplied with a safety clip to prevent unintended closure of the valve.

Preferably used in swimming pools, spas and draining tanks.

The jointing valves: by jointing always using appropriate glues.


The screwing valves: by screwing according to ISO 7/1 recommendations.

SERVICE PRESSURE


The service pressure, just as an indication, it's up to 3.5 bar.

ABREVIATURE INTERPRETATION

d	- Nominal diametre
G	- Nominal diametre of the screw
Quant	- Quantity of fittings that each box contains
Gr	- Approximate weight of fittings in grams
B	- Box 29 x 23 x 16.5

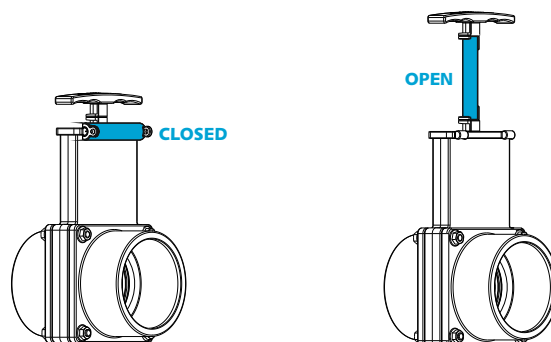

KNIFE GATE VALVES

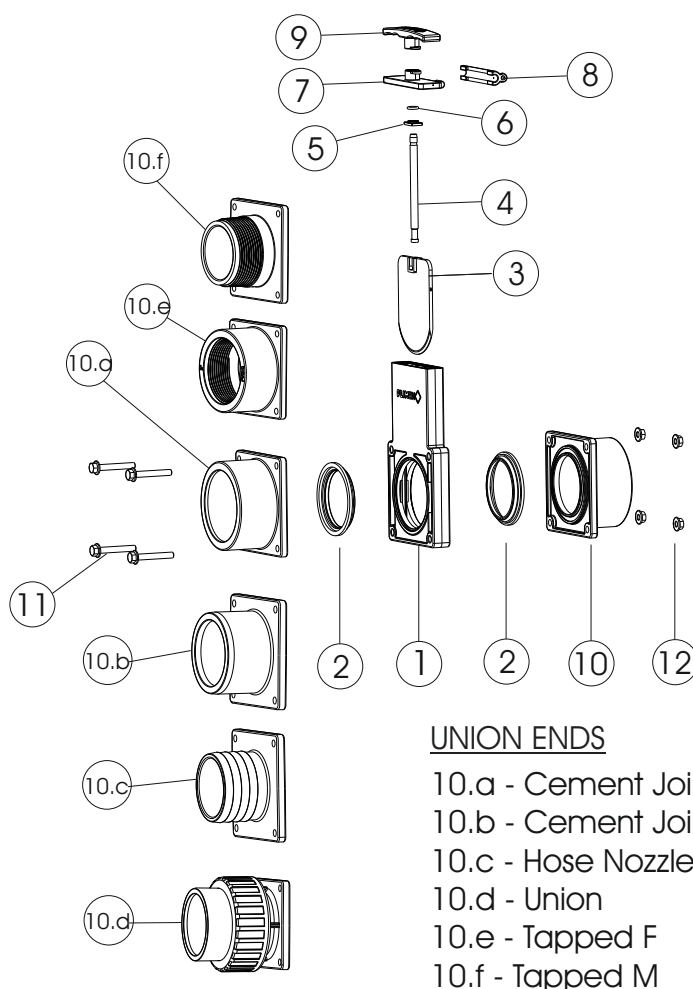

UNION ENDS

- 10.a - Cement Jointing F
- 10.b - Cement Jointing M/F
- 10.c - Hose Nozzle
- 10.d - Union
- 10.e - Tapped F
- 10.f - Tapped M

N° REF.	COMPONENT	MATERIAL	QUANT.	N° REF.	COMPONENTE	MATERIAL	QUANT.
1	Body	ABS	1	7	Cover	ABS	1
2	Gasket	EPDM	2	8	Security Clip	PP	1
3	Paddle	NYLON	1	9	Lever	PP	1
4	Shaft	Stainless Steel AISI 316	1	10	Union Ends	PVC-U	2
5	O'ring base	ABS	1	11	Screw	Stainless Steel	4
6	O'ring	EPDM	1	12	Nut	Stainless Steel	4